


RADIAL TIMBER SEALER/PRESCHEM TIMBER SEALER

EXTERIOR TIMBER SEALER

PRODUCT DATA SHEET

Description

RADIAL TIMBER SEALER is a unique blend of organic and inorganic resins combined with an effective mouldicide which has been developed to seal and protects Australian Timber. RADIAL TIMBER SEALER is suitable for use as a one off initial application, for new or existing hardwood products. RADIAL TINBER SEALER helps reduce surface checking (resulting from rapid moisture loss) while still allowing the timber to naturally grey off from UV exposure.

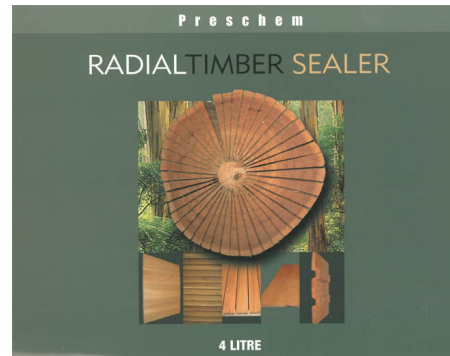

Recommended Uses

RADIAL TIMBER SEALER can be used wherever a true unpigmented clear timber sealer is required to repel and control moisture, hence minimises splitting, cracking and checking that occurs in timber. RADIAL TIMBER SEALER still allows the timber to grey off naturally while leaving it look and feel like timber. RADIAL TIMBER SEALER can be applied to hardwoods used for external cladding, window frames, fences, trellis, decking and pergolas

Directions For Use

Ensure a clean dry surface, free from dirt, grease and wax. Greyed timber should first be cleaned with a suitable wood cleaner such as Preschem GREY DECK CLEANER. Brush spray or wipe one generous coat of Radial Timber Sealer on to the timber and allow 24 hours drying time. Radial Timber Sealer can be applied by any convenient means, such as brush, roller, spray or dip application. Exterior floors or decks can be easily treated with a lamb's wool applicator. If the timber still looks dry, another application may be required. A minimum of 24 hours drying time for decking and areas subject to foot traffic is advisable. Ensure all end grain wood is well coated with Radial Timber Sealer to minimize water absorption.

Maintenance

RADIAL TIMBER SEALER will remain water repellent for over 12 months on fully exposed timber in most conditions, It is designed to a true one time only application on new timber. Note that it will lose water repellency over time. However, if the customer wishes to maintain water repellency while retaining the natural silver-grey weathered look, then it is recommended that Preschem's WEATHER REPELLANT is used.

Approximate Coverage

	Green	Seasoned
Dressed	9-11 m ² /litre	11-12 m ² /litre
Rough Sawn	7-8 m ² /litre	8-9 m ² /litre

Clean-Up

Mineral Turps

Packaging

4, 10 and 20 Lt cans

First Aid and Safety Directions

Avoid contact with skin by wearing gloves and protective clothing. Don't breathe vapour, spray or mist. If poisoning occurs, contact a Doctor or Poison Information centre on 13 11 26

Eyes: Hold eyes open, flood with water for at least 15 minutes

Skin: Remove contaminated clothing and wash skin thoroughly with soapy water

If Swallowed: Do not induce vomiting. Give a glass of water to drink and seek immediate medical attention. Do not give water to unconscious patient.

Manufactured By:

Preschem Pty Ltd
(ABN: 41 314 509 336)
147-149 Herald Street
Cheltenham, VIC 3192
Toll free: 1800 641 711
Website: preschem.com
Email: auquery@preschem.com